

Panel Cutout Adapter(CA4-ATM10-01) Installation Guide

Introduction

This product is a conversion kit for replacing the current display unit manufactured by Pro-face with a display unit that has smaller panel cutout dimensions.

Before	After
GP-2500 series GP-2600 series	AGP-35*0T ST-3500 series

Packing List

- Attachment x1
- Gasket x1
- M4 Hex nut x10 (two spares)

Item	Specified Values	
Installation Requirements	Protective Construction	Protection: Equivalent to IP65 (Front face of installed unit)
	Weight	0.45 kg or less (Attachment only)
	External Dimensions	(W)x(H)x(D) [mm] 317.0 x 243.0 x 17.0
Color	Silver metallic	
Material	Steel plate	

Installation Procedures

- Step 1. Confirm the Display unit (1), four installation fasteners (5) and moisture resistant gasket (2) are present.
- Step 2. Make sure that the moisture resistant gasket is fitted properly to the Display unit.
- Step 3. Install the gasket (4) to the attachment (3) correctly.
- Step 4. Attach the Display to the attachment prepared in Step 3 by using the installation fasteners. Tighten the fastener attachment screws. The proper torque for tightening a screw to obtain a sufficient level of splash-proof is 0.5 N•m.



Do not over-tighten the fastener attachment screws or Display may be damaged.

- Step 5. Insert the attachment prepared in Step 4 in to the cutout section of the operation panel of the target model by matching the threaded portion of the plate with the four corners of the panel.
- Step 6. Confirm the gasket is installed correctly.
- Step 7. Tighten the M4 hex nuts (6) evenly. The proper torque for tightening a nut to obtain a sufficient level of splash-proof is 0.5 N•m.



Do not over-tighten the hex nuts or the attachment may be damaged.

Disclaimer


We assume no responsibility for any losses, damages or any claims from third party resulting from the use of this product.

Head Office
Digital Electronics Corporation
8-2-52 Nanko-higashi
Suminoe-ku, Osaka 559-0031 JAPAN
Tel: +81-(0)6-6613-1101
Fax: +81-(0)6-6613-5888
URL: <http://www.proface.co.jp/>

When the product is disposed of, it should be done so according to your country's regulations for similar types of industrial waste.

© Copyright 2004 Digital Electronics Corporation. All rights reserved.

Completed Chart

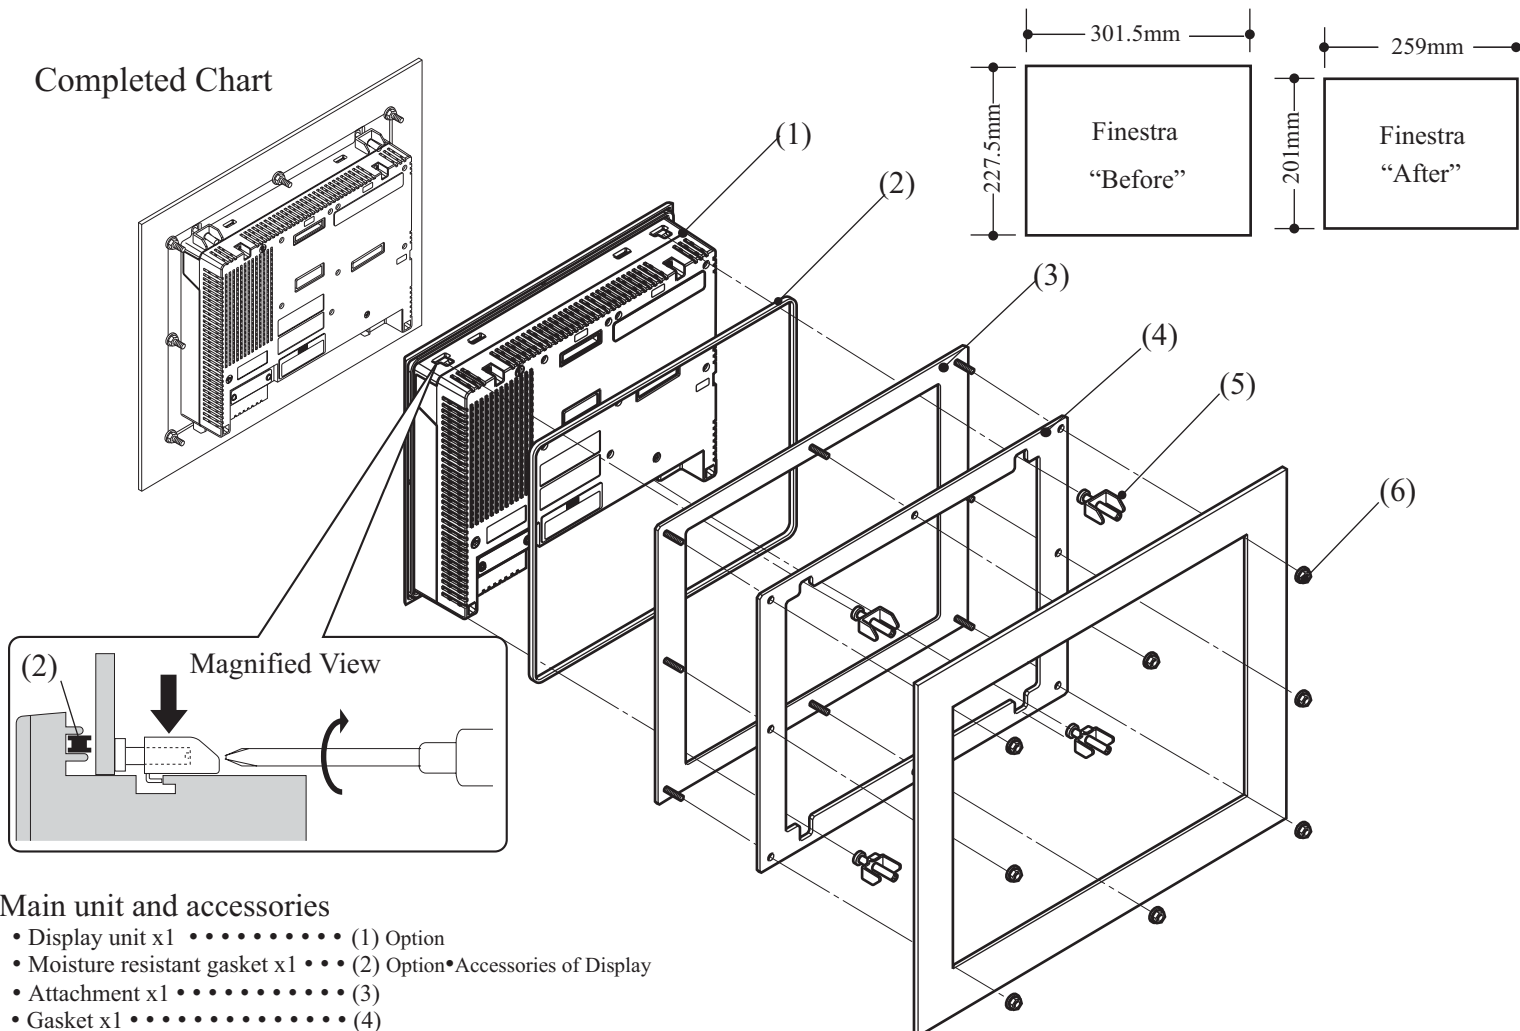

Main unit and accessories

- Display unit x1 (1) Option
- Moisture resistant gasket x1 (2) Option•Accessories of Display
- Attachment x1 (3)
- Gasket x1 (4)
- Installation fastener x4 (5) Option•Accessories of Display
- M4 Hex nut x8 (6)